



Product Service


# CERTIFICATE

No. Z2 107931 0003 Rev. 00

**Holder of Certificate:** YUHUAN SUNPRO POWER CO.,LTD

Qinggang Technological Ind.Zon,  
317606 Yuhuan, Zhejiang Province  
PEOPLE'S REPUBLIC OF CHINA

**Certification Mark:**

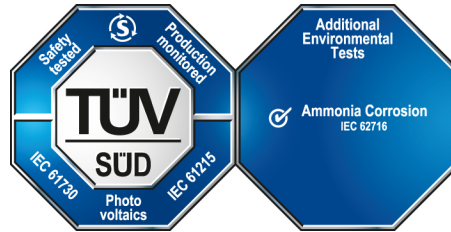

**Product:**

**Crystalline Silicon Terrestrial Photovoltaic (PV) Modules  
Mono-Crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 701262008603-00

**Valid until:** 2025-05-07

**Date,** 2020-07-07

( Zhulin Zhang )

# CERTIFICATE

No. Z2 107931 0003 Rev. 00

## Model(s):

1000 V DC system voltage Single Glass modules:  
 SPxxx-72M, xxx= 330 to 390 in step of 5;  
 SPxxx-60M, xxx= 275 to 325 in step of 5;  
 SPxxx-54M, xxx= 245 to 290 in step of 5;  
 SPxxx-48M, xxx= 220 to 260 in step of 5;  
 SPxxx-24M, xxx= 110 to 130 in step of 5;

1500 V DC system voltage Single Glass modules:  
 SPxxx-72MHV, xxx= 330 to 390 in step of 5;  
 SPxxx-60MHV, xxx= 275 to 325 in step of 5;  
 SPxxx-54MHV, xxx= 245 to 290 in step of 5;  
 SPxxx-48MHV, xxx= 220 to 260 in step of 5;  
 SPxxx-24MHV, xxx= 110 to 130 in step of 5;

Half cell 1000 V DC system voltage Single Glass modules:  
 SPxxx-144M, xxx= 370 to 415 in step of 5;  
 SPxxx-120M, xxx= 305 to 345 in step of 5;  
 SPxxx-108M, xxx= 275 to 315 in step of 5;  
 SPxxx-96M, xxx= 245 to 275 in step of 5;  
 SPxxx-144M, xxx= 430 to 450 in step of 5;  
 SPxxx-120M, xxx= 360 to 375 in step of 5;  
 SPxxx-108M, xxx= 325 to 335 in step of 5;  
 SPxxx-96M, xxx= 290 to 300 in step of 5;

Half cell 1500 V DC system voltage Single Glass modules:  
 SPxxx-144MHV, xxx= 370 to 415 in step of 5;  
 SPxxx-120MHV, xxx= 305 to 345 in step of 5;  
 SPxxx-108MHV, xxx= 275 to 315 in step of 5;  
 SPxxx-96MHV, xxx= 245 to 275 in step of 5;  
 SPxxx-144MHV, xxx= 430 to 450 in step of 5;  
 SPxxx-120MHV, xxx= 360 to 375 in step of 5;  
 SPxxx-108MHV, xxx= 325 to 335 in step of 5;  
 SPxxx-96MHV, xxx= 290 to 300 in step of 5;

xxx is standing for rated output power at STC

## Parameters:

Construction:	Framed, with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC or 1000 V DC
Fire Safety Class:	Class C

## Tested according to:

IEC 61215-1(ed.1)  
 IEC 61215-1-1(ed.1)  
 IEC 61215-2(ed.1)  
 IEC 61730-1(ed.2)  
 IEC 61730-2(ed.2)  
 IEC 62716(ed.1)

## Production Facility(ies):

083334