



Accessories

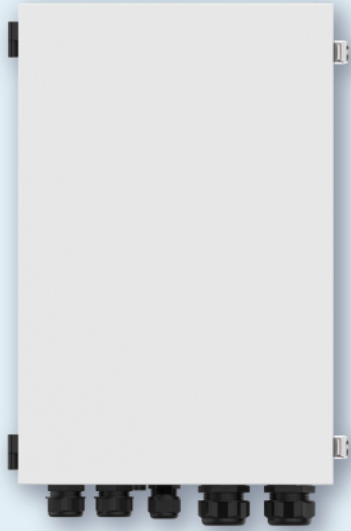

X3-Matebox G2

We get rid of complicated wiring work by laying all the wires in the Matebox. All you need to do is just to connect all the cables which are already well-sorted in the Matebox. This helps to save time and money.

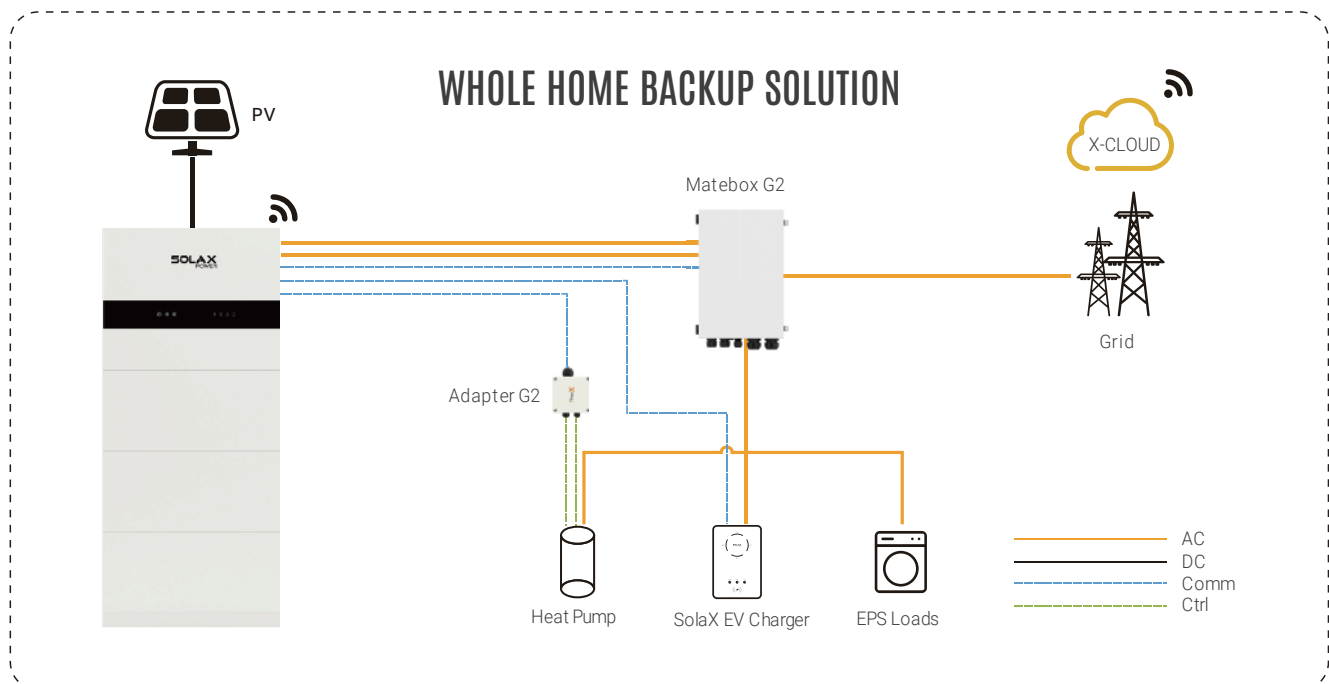

X3-Matebox G2

ON-GRID (INVERTER)	
Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. Grid (INV) apparent power	16500 VA
Max. Grid (INV) current	32 A
OFF-GRID (INVERTER)	
Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Nominal Off-grid (INV) apparent power	15000 VA
Max. current	25 A
Peak apparent power	30000 VA
GRID (UTILITY)	
Rated grid voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. input current	63 A
LOAD	
Rated voltage, frequency	380 / 400 / 415 Vac, 50 / 60 Hz
Max. current	63 A
ENVIRONMENT LIMIT	
Degree of protection	IP65
Protection class	Class I
Operating temperature range	-25 ~ 60°C (Derating above 45°C)
Storage temperature	-40 ~ 70°C
Relative humidity	0 ~ 100%
Altitude	< 3000 m
Overvoltage category	III (AC)
OTHER	
Cooling concept	Natural cooling
DIMENSION AND WEIGHT	
Dimensions	549 x 360 x 192 mm
Net weight	13.5 kg