



Product Service


CERTIFICATE

No. Z2 099333 0081 Rev. 05

Holder of Certificate: LONGi Green Energy Technology Co., Ltd.

No. 388, Middle Hangtian Road
Chang'an District
710100 Xi'an City, Shaanxi
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

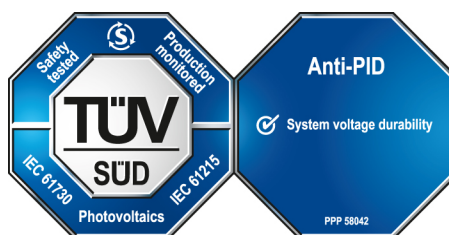

Product:

**Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062000948-05

Valid until: 2027-01-23

Date, 2022-01-28

(David Bo)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

CERTIFICATE

No. Z2 099333 0081 Rev. 05

Model(s):

LR6-72HV-xxxM, (xxx=335-360 in step of 5)
 LR6-60HV-xxxM, (xxx=280-300 in step of 5)
 LR6-72PH-xxxM, (xxx=340-380 in step of 5)
 LR6-60PH-xxxM, (xxx=285-315 in step of 5)
 LR6-72PH-xxxM, (xxx=365-395 in step of 5)
 LR6-72HIH-xxxM, (xxx=365-395 in step of 5)
 LR6-60HPH-xxxM, (xxx=300-325, in step of 5)
 LR6-60HIH-xxxM, (xxx=300-325 in step of 5)
 LR6-72OPH-xxxM, (xxx=385-415 in step of 5)
 LR6-60OPH-xxxM, (xxx=335-365 in step of 5)
 LR6-72HPH-xxxMC, (xxx=375-390 in step of 5)
 LR6-60HPH-xxxMC, (xxx=305-325 in step of 5)
 LR6-60ZPH-xxxM, (xxx=330-355 in step of 5)
 LR4-72HPH-xxxM, (xxx=420-465 in step of 5)
 LR4-72HIH-xxxM, (xxx=420-465 in step of 5)
 LR4-60HPH-xxxM, (xxx=350-380 in step of 5)
 LR4-60HIH-xxxM, (xxx=350-380 in step of 5)
 LR4-72ZPH-xxxM, (xxx=420-435 in step of 5)
 LR4-60ZPH-xxxM, (xxx=350-365 in step of 5)
 LR4-78ZPH-xxxM, (xxx=455-485 in step of 5)
 LR5-72HPH-xxxM, (xxx=525-555 in step of 5)
 LR5-66HPH-xxxM, (xxx=480-505 in step of 5)
 LR4-66HPH-xxxM, (xxx=395-425 in step of 5)
 LR4-66HIH-xxxM, (xxx=395-425 in step of 5)
 LR5-72HIH-xxxM, (xxx=525-545 in step of 5)
 LR5-66HIH-xxxM, (xxx=480-500 in step of 5)
 LR5-78HPH-xxxM, (xxx=575-595 in step of 5)
 LR5-78ZPH-xxxM, (xxx=565-585 in step of 5)
 LR4-50HPH-xxxM, (xxx=305-320 in step of 5)
 LR4-66HTB-xxxM, (xxx=410-430 in step of 5)
 LR4-60HTB-xxxM, (xxx=370-390 in step of 5)
 LR5-54HPH-xxxM, (xxx=395-415 in step of 5)
 LR4-66HTH-xxxM, (xxx=420-440 in step of 5)
 LR4-60HTH-xxxM, (xxx=380-400 in step of 5)
 xxx stands for rated output power at STC

Parameters:

Fire Safety Class:	Class C according to UL790.
Safety Class:	Class II
Max. System Voltage:	1500V DC
PID Test Condition:	Test method a of IEC TS 62804-1:2015, ±1500V DC, 96 or 192 Hours, 85% RH, 85°C.
Construction:	Framed, with Junction box, cable and connector.

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 PPP 58042B:2015